

Kubota®

KUBOTA UTILITY VEHICLE

RTV1140CPX



*This information is sourced from overseas and may not necessarily apply locally. It is essential that you confirm specifications and other information with your local Kubota dealer.

More cargo space or more

With the new 24.8HP Kubota RTV1140CPX Four-Seater, you can have both industry-leading cargo capacity and comfortable seating for up to four adults. When hauling cargo is the job, the RTV's standard hydrostatic power steering, heavy-duty VHT Plus transmission and large, hydraulic dumping bed make work easy. When carrying friends, family or coworkers is the task, just reduce the bed size to add a second row of seating. The RTV1140CPX gives you the best of both worlds.



seating? How about both?



Two-person seating configuration

KUBOTA UTILITY VEHICLE

RTV1140CPX

seating? How about both?



Four-person seating configuration

Standard Hydraulic Dumping Bed

Dump sand, gravel, turf, or just about anything you can think of, from the RTV1140CPX's whopping, 18.3 cu. ft./11.7 cu. ft. (two-seat and four-seat configurations, respectively) capacity cargo bed. An easy-to-operate lever activates this true hydraulic bed-left system in either two or four-seat configuration.


High Power Diesel Engine

The Kubota D1105 3-cylinder engine, with 1,123cc and 24.8HP, gives the RTV1140CPX excellent acceleration and the ability to take on almost any terrain or task.



VHT Plus (Variable Hydro Transmission)

A Kubota exclusive! The RTV1140CPX's high-performance, three-range VHT Plus offers you the performance you require under demanding conditions. Tackle hills with quick acceleration, smooth, engine-assisted deceleration and superior "hill-holding" abilities. VHT Plus has the power and control to safely take you just about anywhere.

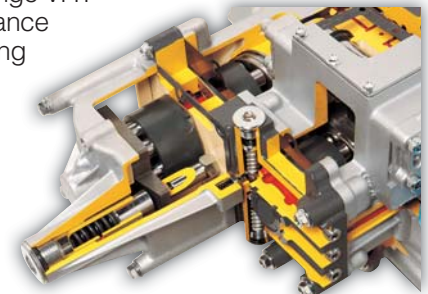

An innovative 3-step conversion does the trick.



1 Fold the front and sides of the bed.

The front and front sides of the cargo bed have been built with hinges to conveniently fold up and in towards the back of the bed.

2 Flip down the two-person bench seat and lock it in place.

Next, flip down the hinged bench seat and secure it into place.

3 Slide back the protective screen.

Finally, slide back the protective screen and attached seat back all the way to the bed and lock it in place. Now you're ready to ride. Reverse these three actions for access to the RTV1140CPX's full bed capacity.



Large and Clear Instrumentation

The RTV1140CPX's instrument panel offers a convenient and quick-read layout, so you can spend more time with your eyes on the road. Monitor lamps include oil level, charge status and more.

Hydrostatic Power Steering

Quick, responsive and agile on all terrains. Kubota RTVs were the first vehicle in their class to be equipped with hydrostatic power steering. The RTV1140CPX is no exception.

ROPS Protection

A sturdy standard ROPS (Rollover Protective Structure) and heavy-duty protective screen give you the rollover and accident shelter you and your passengers need. The RTV1140CPX's ROPS is OSHA 1928.52 compliant.

Specifications

Model			RTV1140CPX
Engine	Make		KUBOTA D1105-E3-UV
	Type		3-cylinders, Water cooled 4-cycle, diesel, OHV
	Displacement	cc	1123
	Horsepower	HP (kW)/rpm	24.8 (18.5)@3000
Fuel tank capacity	ℓ		30
Transmission			Variable hydro transmission (VHT)
Max. Traveling speed	km/h		40
Wheels, drive system			Rear 2WD or 4WD selection
Differential lock			Standard; foot operated with mechanical holder
Gear selection			Hi-Med-Lo range forward, neutral, reverse
Brakes	Front / Rear		Wet-disc brake
	Parking brake		Rear wheel, hand lever
Steering			Hydrostatic power
Suspension	Front / Rear		Independent, Mac-Pherson strut-type / Semi-independent, DeDion axle w/leaf springs and shock absorbers
Dimensions	Length	mm	3480
	Width	mm	1544
	Height, overall	mm	2020
	Front tread centers	mm	1150
	Rear tread centers	mm	1180
	Wheelbase	mm	2415
	Ground clearance front/rear axle	mm	195 / 190
	Turning radius	m	4.8
Max. rolling weight (Towing capacity)	kg		590
Payload capacity	kg		745
Weight	kg		1070
Cargo bed	Width × Length × Depth	mm	1320 × 860 / 1360 × 290
	Volume	m ³	0.33 / 0.52
	Bed height (unloaded)	mm	820
	Cargo bed load	kg	300 [2ROWS] / 500 [1ROW]
Tyres	Front		25×10-12 HDWS, 6PLY
			25×12-12 TURF, 4PLY
	Rear		25×10-12 HDWS, 6PLY
			25×12-12 TURF, 4PLY
Front guard			Std.
Hydraulic bed lift			Std.
Speedometer			Std.

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty and safety information. The values in "Ground clearance" and "Weight" are those of the machine equipped with the tires in the table above. Some RTVs in this brochure are shown with optional accessories. For off-highway use only.

KUBOTA Tractor Australia Pty Ltd

25-29 Permas Way, TRUGANINA Vic, 3029
 Freecall: 1800 334 653
 Email: sales@kubota.com.au

Web Site: <http://www.kubota.com.au>

CB Norwood Distributors Ltd

PO Box 1265, 888 Tremain Avenue,
 Palmerston North 0800 KUBOTA
 Tel: 06 356 4920 Fax: 06 356 4939

Web Site: <http://www.kubota.co.nz>



©2010 Kubota Corporation

Cat.No.0000-01-AA Printed in Japan.D.REX.'10-JUN.